

# Self-Tapping Screws with AW® drive

Raised countersunk screw similar to DIN 7983 (ISO 7051) shape C, with tip

Steel, Delta Seal – black

- Excellent surface protective coating properties:
  - **No harmful heavy metals such as cadmium or chromium VI,**
  - Excellent adhesive strength,
  - Especially high abrasion resistance.

Nominal dia. in mm	2.9	3.5	3.9	4.2	4.8
Head dia. $d_k$ in mm	5.6	6.8	7.5	8.1	9.5
Head height k in mm	2.15	2.65	2.95	3.1	3.6
Drive	AW 10	AW10	AW20	AW20	AW25


Nominal dia. in mm	Length l in mm	Steel, Delta Seal, black Art. No.	P. Qty.
2,9	9,5	<b>0112 329 95</b>	100/1000
	13	<b>0112 329 13</b>	
	16	<b>0112 329 16</b>	
	19	<b>0112 329 19</b>	
	22	<b>0112 329 22</b>	100
3.5	25	<b>0112 329 25</b>	100/1000
	9,5	<b>0112 335 95</b>	
	13	<b>0112 335 13</b>	
	16	<b>0112 335 16</b>	
	19	<b>0112 335 19</b>	
	22	<b>0112 335 22</b>	
3.9	25	<b>0112 335 25</b>	100/1000
	32	<b>0112 335 32</b>	
	9,5	<b>0112 339 95</b>	
	13	<b>0112 339 13</b>	
	16	<b>0112 339 16</b>	
	19	<b>0112 339 19</b>	
	22	<b>0112 339 22</b>	
4.2	25	<b>0112 339 25</b>	100/1000
	32	<b>0112 339 32</b>	
	38	<b>0112 339 38</b>	
	13	<b>0112 342 13</b>	
	16	<b>0112 342 16</b>	
	19	<b>0112 342 19</b>	
	22	<b>0112 342 22</b>	
	25	<b>0112 342 25</b>	
4.8	32	<b>0112 342 32</b>	100/1000
	38	<b>0112 342 38</b>	
	16	<b>0112 348 16</b>	
	19	<b>0112 348 19</b>	
	22	<b>0112 348 22</b>	
	25	<b>0112 348 25</b>	
4.8	32	<b>0112 348 32</b>	100/300
	38	<b>0112 348 38</b>	
	16	<b>0112 348 16</b>	
	19	<b>0112 348 19</b>	
4.8	22	<b>0112 348 22</b>	100
	25	<b>0112 348 25</b>	
	32	<b>0112 348 32</b>	
	38	<b>0112 348 38</b>	

## Range ORSY 100



Art. No. 0964 112 30

Contents: 1800 self-tapping screws and 3 bits  
(AW 10 / AW 20 / AW 25)  
0112 329 95 / 13 / 16 / 19  
0112 335 13 / 16 / 19 / 25  
0112 339 16 / 19 / 25 / 32  
0112 342 16 / 19 / 25  
0112 348 19 / 22 / 25

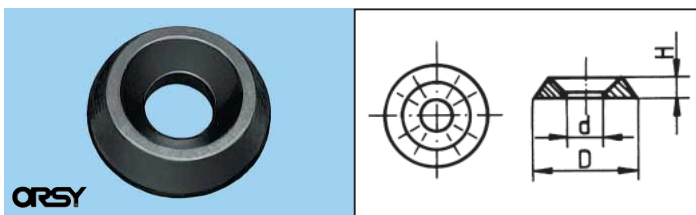

## Rosettes

- Rosettes are required for screw connections in vehicle-interiors (e.g. instrument panel, interior linings, handles etc.).

Design	d in mm	D in mm	H in mm	for screw nom. dia. in mm	Art. No.	P. Qty.
Ms black galvanised	5.0	11.0	2.4	3.5	<b>0458 411 5</b>	100/1000
	4.8	12.7	2.7	3.9	<b>0458 412 5</b>	
	6.0	13.0	3.0	4.8	<b>0458 413 6</b>	
Plastic black	4.3	12.0	3.0	3.5 / 3.9	<b>0458 012 4</b>	100
	6.0	13.0	3.5	4.8	<b>0458 138 81</b>	