

Countersunk screw with hexalobular head

ISO 14581 plain A2-070 stainless steel

Increase in assembly productivity

When elements are joined using hexalobular (TX) fasteners, the force is transmitted over a large surface area across the flanks of the drive rather than being centred on one point, as is the case with hexagon socket drives, for example. This has a number of advantages:


- Reduced tool wear
- Tool does not slip because force is distributed optimally
- No damage to surface coating
- No wobbling
- Screw locates securely



Hexalobular drives must comply with DIN EN ISO 10664

- As a result, connection elements with hexalobular heads are standardised and can be used all over the world

Standards	ISO 14581
Material	Stainless steel A2
Property class	070
Surface	Plain
RoHS-compliant	Yes

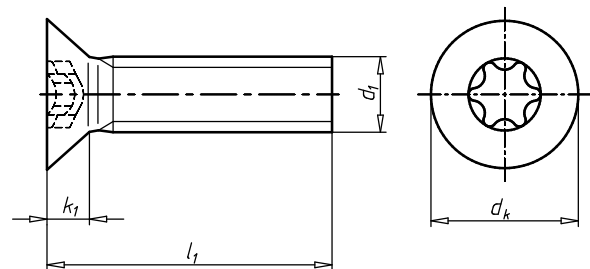

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive	Art. no.	P. Qty.
M2	4 mm	3.8 mm	1.2 mm	TX6	4024 2 4	1000
M2	5 mm	3.8 mm	1.2 mm	TX6	4024 2 5	2000
M2	6 mm	3.8 mm	1.2 mm	TX6	4024 2 6	1000
M2	8 mm	3.8 mm	1.2 mm	TX6	4024 2 8	1000
M2	12 mm	3.8 mm	1.2 mm	TX6	4024 2 12	1000
M2	14 mm	3.8 mm	1.2 mm	TX6	4024 2 14	1000
M2	16 mm	3.8 mm	1.2 mm	TX6	4024 2 16	1000
M2	20 mm	3.8 mm	1.2 mm	TX6	4024 2 20	1000
M2.5	4 mm	4.7 mm	1.5 mm	TX8	4024 25 4	1000
M2.5	5 mm	4.7 mm	1.5 mm	TX8	4024 25 5	1000
M2.5	6 mm	4.7 mm	1.5 mm	TX8	4024 25 6	2000
M2.5	8 mm	4.7 mm	1.5 mm	TX8	4024 25 8	2000
M2.5	10 mm	4.7 mm	1.5 mm	TX8	4024 25 10	1000
M2.5	12 mm	4.7 mm	1.5 mm	TX8	4024 25 12	1000
M2.5	14 mm	4.7 mm	1.5 mm	TX8	4024 25 14	1000
M2.5	16 mm	4.7 mm	1.5 mm	TX8	4024 25 16	1000
M2.5	20 mm	4.7 mm	1.5 mm	TX8	4024 25 20	1000

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive	Art. no.	P. Qty.
M2.5	25 mm	4.7 mm	1.5 mm	TX8	4024 25 25	1000
M3	4 mm	5.5 mm	1.65 mm	TX10	4024 3 4	1000
M3	5 mm	5.5 mm	1.65 mm	TX10	4024 3 5	2000
M3	6 mm	5.5 mm	1.65 mm	TX10	4024 3 6	500/2000
M3	8 mm	5.5 mm	1.65 mm	TX10	4024 3 8	500/2000
M3	10 mm	5.5 mm	1.65 mm	TX10	4024 3 10	500/1000
M3	12 mm	5.5 mm	1.65 mm	TX10	4024 3 12	500/1000
M3	14 mm	5.5 mm	1.65 mm	TX10	4024 3 14	1000
M3	16 mm	5.5 mm	1.65 mm	TX10	4024 3 16	500/1000
M3	20 mm	5.5 mm	1.65 mm	TX10	4024 3 20	500/1000
M3	25 mm	5.5 mm	1.65 mm	TX10	4024 3 25	500/1000
M3	30 mm	5.5 mm	1.65 mm	TX10	4024 3 30	500/1000
M4	6 mm	8.4 mm	2.7 mm	TX20	4024 4 6	500/1000
M4	8 mm	8.4 mm	2.7 mm	TX20	4024 4 8	500/1000
M4	10 mm	8.4 mm	2.7 mm	TX20	4024 4 10	500/1000
M4	12 mm	8.4 mm	2.7 mm	TX20	4024 4 12	500/1000
M4	14 mm	8.4 mm	2.7 mm	TX20	4024 4 14	1000
M4	16 mm	8.4 mm	2.7 mm	TX20	4024 4 16	500/1000
M4	18 mm	8.4 mm	2.7 mm	TX20	4024 4 18	1000
M4	20 mm	8.4 mm	2.7 mm	TX20	4024 4 20	500/1000
M4	25 mm	8.4 mm	2.7 mm	TX20	4024 4 25	500/1000
M4	30 mm	8.4 mm	2.7 mm	TX20	4024 4 30	500/1000
M4	35 mm	8.4 mm	2.7 mm	TX20	4024 4 35	1000
M4	40 mm	8.4 mm	2.7 mm	TX20	4024 4 40	500/1000
M4	50 mm	8.4 mm	2.7 mm	TX20	4024 4 50	500
M5	6 mm	9.3 mm	2.7 mm	TX25	4024 5 6	500
M5	8 mm	9.3 mm	2.7 mm	TX25	4024 5 8	500
M5	10 mm	9.3 mm	2.7 mm	TX25	4024 5 10	500
M5	12 mm	9.3 mm	2.7 mm	TX25	4024 5 12	500
M5	14 mm	9.3 mm	2.7 mm	TX25	4024 5 14	500
M5	16 mm	9.3 mm	2.7 mm	TX25	4024 5 16	500
M5	20 mm	9.3 mm	2.7 mm	TX25	4024 5 20	500
M5	25 mm	9.3 mm	2.7 mm	TX25	4024 5 25	500
M5	30 mm	9.3 mm	2.7 mm	TX25	4024 5 30	500
M5	35 mm	9.3 mm	2.7 mm	TX25	4024 5 35	200/500
M5	40 mm	9.3 mm	2.7 mm	TX25	4024 5 40	200/500
M5	45 mm	9.3 mm	2.7 mm	TX25	4024 5 45	500
M5	50 mm	9.3 mm	2.7 mm	TX25	4024 5 50	200/500
M5	60 mm	9.3 mm	2.7 mm	TX25	4024 5 60	200
M6	8 mm	11.3 mm	3.3 mm	TX30	4024 6 8	500
M6	10 mm	11.3 mm	3.3 mm	TX30	4024 6 10	500/1000
M6	12 mm	11.3 mm	3.3 mm	TX30	4024 6 12	500
M6	14 mm	11.3 mm	3.3 mm	TX30	4024 6 14	500
M6	16 mm	11.3 mm	3.3 mm	TX30	4024 6 16	500
M6	20 mm	11.3 mm	3.3 mm	TX30	4024 6 20	500
M6	25 mm	11.3 mm	3.3 mm	TX30	4024 6 25	500
M6	30 mm	11.3 mm	3.3 mm	TX30	4024 6 30	500
M6	35 mm	11.3 mm	3.3 mm	TX30	4024 6 35	200/500
M6	40 mm	11.3 mm	3.3 mm	TX30	4024 6 40	200/500
M6	45 mm	11.3 mm	3.3 mm	TX30	4024 6 45	200/500
M6	50 mm	11.3 mm	3.3 mm	TX30	4024 6 50	200/500
M6	55 mm	11.3 mm	3.3 mm	TX30	4024 6 55	500
M6	60 mm	11.3 mm	3.3 mm	TX30	4024 6 60	200/500

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head diameter (d _k)	Head height (k ₁)	Internal drive	Art. no.	P. Qty.
M6	70 mm	11.3 mm	3.3 mm	TX30	4024 6 70	200
M6	80 mm	11.3 mm	3.3 mm	TX30	4024 6 80	200
M8	10 mm	15.8 mm	4.65 mm	TX45	4024 8 10	200
M8	12 mm	15.8 mm	4.65 mm	TX45	4024 8 12	200
M8	14 mm	15.8 mm	4.65 mm	TX45	4024 8 14	500
M8	16 mm	15.8 mm	4.65 mm	TX45	4024 8 16	200
M8	20 mm	15.8 mm	4.65 mm	TX45	4024 8 20	200
M8	25 mm	15.8 mm	4.65 mm	TX45	4024 8 25	200
M8	30 mm	15.8 mm	4.65 mm	TX45	4024 8 30	200
M8	35 mm	15.8 mm	4.65 mm	TX45	4024 8 35	200
M8	40 mm	15.8 mm	4.65 mm	TX45	4024 8 40	200
M8	45 mm	15.8 mm	4.65 mm	TX45	4024 8 45	200
M8	50 mm	15.8 mm	4.65 mm	TX45	4024 8 50	200
M8	60 mm	15.8 mm	4.65 mm	TX45	4024 8 60	200
M8	70 mm	15.8 mm	4.65 mm	TX45	4024 8 70	100
M8	80 mm	15.8 mm	4.65 mm	TX45	4024 8 80	100
M8	90 mm	15.8 mm	4.65 mm	TX45	4024 8 90	100
M8	100 mm	15.8 mm	4.65 mm	TX45	4024 8 100	100
M10	16 mm	18.3 mm	5 mm	TX50	4024 10 16	200
M10	20 mm	18.3 mm	5 mm	TX50	4024 10 20	200
M10	25 mm	18.3 mm	5 mm	TX50	4024 10 25	200
M10	30 mm	18.3 mm	5 mm	TX50	4024 10 30	200
M10	35 mm	18.3 mm	5 mm	TX50	4024 10 35	100
M10	40 mm	18.3 mm	5 mm	TX50	4024 10 40	100
M10	45 mm	18.3 mm	5 mm	TX50	4024 10 45	100
M10	50 mm	18.3 mm	5 mm	TX50	4024 10 50	100
M10	60 mm	18.3 mm	5 mm	TX50	4024 10 60	100
M10	70 mm	18.3 mm	5 mm	TX50	4024 10 70	100
M10	80 mm	18.3 mm	5 mm	TX50	4024 10 80	100
M10	90 mm	18.3 mm	5 mm	TX50	4024 10 90	100
M10	100 mm	18.3 mm	5 mm	TX50	4024 10 100	100
M10	120 mm	18.3 mm	5 mm	TX50	4024 10 120	100

Notice

- Head dimensions in ISO 14581 countersunk screws are gauged in accordance with ISO 7721
 - Some screws with short dimensions are threaded up to the head, see ISO 14581
- Countersinks for screw heads in accordance with ISO 14581 must comply with ISO 15065

Related products for	Designation	Art. no.
4024 3 4	TX bit TX10; Length 25 mm	0614 311 0
4024 3 5	TX bit TX10; Length 25 mm	0614 311 0
4024 3 6	TX bit TX10; Length 25 mm	0614 311 0
4024 3 8	TX bit TX10; Length 25 mm	0614 311 0
4024 3 10	TX bit TX10; Length 25 mm	0614 311 0
4024 3 12	TX bit TX10; Length 25 mm	0614 311 0
4024 3 14	TX bit TX10; Length 25 mm	0614 311 0
4024 3 16	TX bit TX10; Length 25 mm	0614 311 0
4024 3 20	TX bit TX10; Length 25 mm	0614 311 0

Related products for	Designation	Art. no.
4024 3 25	TX bit TX10; Length 25 mm	0614 311 0
4024 3 30	TX bit TX10; Length 25 mm	0614 311 0
4024 4 6	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 8	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 10	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 12	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 14	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 16	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 20	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 25	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 30	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 35	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 40	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 4 50	TX bit TX20; Length 25 mm	0614 312 0
	TX bit TX20; Length 100 mm	0614 787 201
	TX bit TX20; Length 50 mm	0614 787 205
	TX bit TX20; Length 75 mm	0614 788 120
4024 5 6	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125

Related products for	Designation	Art. no.
4024 5 8	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 10	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 12	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 14	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 16	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 20	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 25	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 30	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 35	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 40	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 45	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 50	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125
4024 5 60	TX bit TX25; Length 25 mm	0614 312 5
	TX bit TX25; Length 100 mm	0614 787 251
	TX bit TX25; Length 50 mm	0614 787 255
	TX bit TX25; Length 75 mm	0614 788 125

Related products for	Designation	Art. no.
4024 6 8	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 10	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 12	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 14	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 16	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 20	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 25	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 30	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 35	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 40	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 45	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 50	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 55	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130

Related products for	Designation	Art. no.
4024 6 60	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 70	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 6 80	TX bit TX30; Length 25 mm	0614 313 0
	TX bit TX30; Length 100 mm	0614 787 301
	TX bit TX30; Length 50 mm	0614 787 305
	TX bit TX30; Length 75 mm	0614 788 130
4024 8 10	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 12	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 14	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 16	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 20	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 25	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 30	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 35	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 40	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 45	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245

Related products for	Designation	Art. no.
4024 8 50	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 60	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 70	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 80	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 90	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 8 100	TX bit TX45; Length 35 mm	0614 314 51
	TX bit TX45; Length 50 mm	0614 787 455
	TX bit TX45; Length 75 mm	0614 788 145
	TX bit TX45; Length 120 mm	0614 788 245
4024 10 16	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 20	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 25	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 30	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 35	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 40	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 45	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 50	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 60	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 70	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155

Related products for	Designation	Art. no.
4024 10 80	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 90	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 100	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155
4024 10 120	TX bit TX50; Length 35 mm	0614 315 0
	TX bit TX50; Length 35 mm	0614 315 01
	TX bit TX55; Length 75 mm	0614 788 155