


Flat connector MINI MIC SRS 1.5

Design	Sealed
Nominal size of flat plug/ push connector/blade connector	1.5 x 0.8 mm
Seal diameter	3.4 mm
Material	Brass
Surface	Tin plated

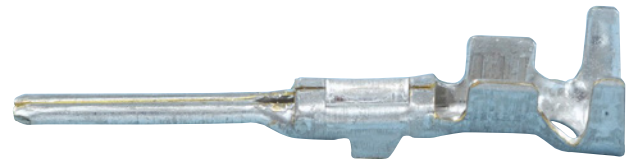

Min./max. wire cross section	Min./max. diameter of insulation	Art. no.	P. Qty.
0.35-0.5 mm ²	1.2-1.6 mm	0558 995 79	100
0.75-1.5 mm ²	1.7-2.4 mm	0558 995 81	100
1.5-2.5 mm ²	2.2-3.3 mm	0558 995 83	100

Can be stored in ORSY system

Related products for	Designation	Art. no.
0558 995 79	Single wire seal (SEAL) Min./max. diameter of insulation 1.2-2.1 mm	0558 991 406
	Single wire seal (SEAL) Min./max. diameter of insulation 1.9-3.0 mm	0558 991 407
	Single wire seal (SEAL) Min./max. diameter of insulation 1.4-2.1 mm	0558 991 408
	Single wire seal (SEAL) Min./max. diameter of insulation 2.2-3.0 mm	0558 991 409
	Single wire seal (SEAL) Min./max. diameter of insulation 1.7-2.4 mm	0558 991 41
	Single wire seal (SEAL) Min./max. diameter of insulation 2.5-3.3 mm	0558 991 42
	Release tool	0713 558 241
	Crimping pliers With integrated locator	0714 107 130
	Crimping tool for replaceable heads	0714 107 500
	Crimping tool for replaceable heads	0714 107 501
	Tool head, small design	0714 107 565
0558 995 81	Single wire seal (SEAL) Min./max. diameter of insulation 1.2-2.1 mm	0558 991 406
	Single wire seal (SEAL) Min./max. diameter of insulation 1.9-3.0 mm	0558 991 407
	Single wire seal (SEAL) Min./max. diameter of insulation 1.4-2.1 mm	0558 991 408
	Single wire seal (SEAL) Min./max. diameter of insulation 2.2-3.0 mm	0558 991 409
	Single wire seal (SEAL) Min./max. diameter of insulation 1.7-2.4 mm	0558 991 41
	Single wire seal (SEAL) Min./max. diameter of insulation 2.5-3.3 mm	0558 991 42
	Release tool	0713 558 241
	Crimping pliers With integrated locator	0714 107 130
	Crimping tool for replaceable heads	0714 107 500
	Crimping tool for replaceable heads	0714 107 501
	Tool head, small design	0714 107 565
0558 995 83	Single wire seal (SEAL) Min./max. diameter of insulation 1.2-2.1 mm	0558 991 406
	Single wire seal (SEAL) Min./max. diameter of insulation 1.9-3.0 mm	0558 991 407
	Single wire seal (SEAL) Min./max. diameter of insulation 1.4-2.1 mm	0558 991 408
	Single wire seal (SEAL) Min./max. diameter of insulation 2.2-3.0 mm	0558 991 409
	Single wire seal (SEAL) Min./max. diameter of insulation 1.7-2.4 mm	0558 991 41
	Single wire seal (SEAL) Min./max. diameter of insulation 2.5-3.3 mm	0558 991 42
	Release tool	0713 558 241
	Crimping pliers With integrated locator	0714 107 130
	Crimping tool for replaceable heads	0714 107 500
	Crimping tool for replaceable heads	0714 107 501
	Tool head, small design	0714 107 565