


NETBIOKEM

Commercial grade disinfectant for all hard surfaces.

20th July 2020 - V1.0

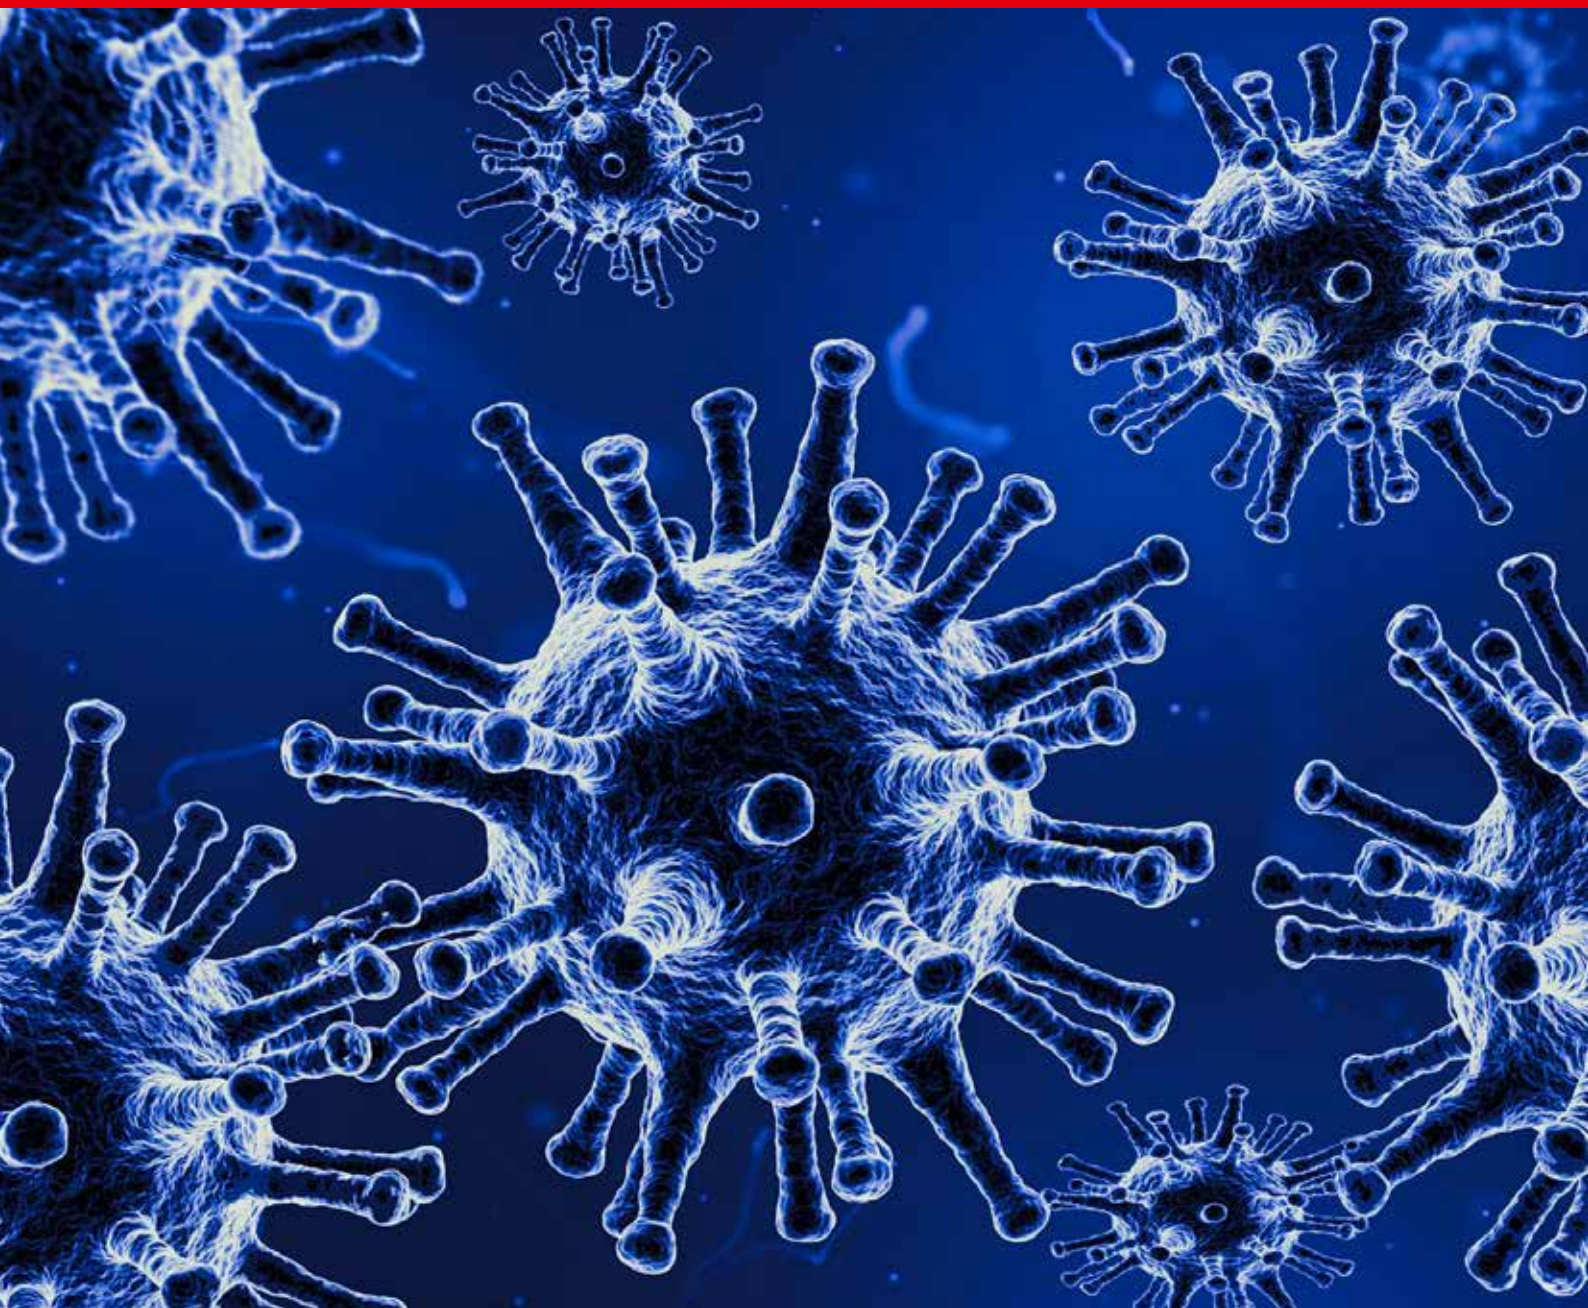

NETBIOKEM DSAM COMMERCIAL GRADE DISINFECTANT CLEANER



Commercial grade disinfectant cleaner for all hard surfaces.

- Kills SARS-CoV-2 (COVID-19 virus) in dirty conditions within two minutes.
- Ready to use 2-in-1 solution, eliminating the need for pre-clean process.
- It provides broad-spectrum disinfection in industrial, institutional, healthcare and household settings.
- Will not harm or damage fabrics, plastic, metals, rubber, or other surfaces. It has been tested against relevant aviation material standards.
- Non-flammable and non-toxic formulation
- Demonstrated efficacy against mould species.

Contents	Smell/Fragrance	Chemical Basis	Art. No.	P. Qty.
500 ml	Characteristic	Water	9501 007 186	1/12
5 L			9501 007 185	1
20 L			9501 007 187	
Tap for 20 L			0891 302 09	

Details/Application:

- Suitable for all transport, commercial, industrial, institutional, health services, military, and any essential services industry
- Complies with Aviation material standards

Instructions

Spray:

Spray only enough Netbiokem DSAM to just cover the surface. Do not over-wet. Allow up to 2 minutes of contact time for disinfection and wipe the surface with a clean dry lint-free cloth. No need to rinse. For heavily soiled surfaces, a second application may be required. For food contact surfaces, rinse and dry afterward. Use biocides with caution. Read the label before use.

Liquid/Wipe:

Apply Netbiokem DSAM liquid onto the wipe material until wet. Wipe and leave for up to 2 minutes to ensure complete disinfection. Wipe the surface with a clean, dry lint-free cloth. It is recommended to also rinse and dry if the surfaces are in contact with food.

Fog:

All fog treatments must be carried out in empty premises/areas with any air conditioning and recirculation systems switched off. Ensure all external doors are closed and any internal doors and small space closures are open.

The positioning of static fogging equipment or movement of portable fogging equipment must be carried out to achieve a minimum dosage rate of 8ml/m³. Fogging applications must use

the minimum amount of products and should not produce any pools or drips. If this is happening then the product is being over-used and must be immediately wiped dry.

The target particle size can range between 10µm - 50µm however for optimal performance we recommend a range between 20µm - 30µm with fogging application.

Consult the Safety Data Sheet for full safety instructions. Refer to Netbiokem DSAM Technical Application Spec Sheet for further instructions.

Treatment Of Mould:

Mould will develop over time in closed areas and workplaces where there is little to no airflow, and condensation caused by heating and cooling (refer to WHO guidelines for indoor air quality: dampness and mould). Parked aircraft and closed work-places are common environments where this will happen.

The mould that is of concern for human health is the Aspergillus species. Netbiokem DSAM has demonstrated efficacy against the species Aspergillus niger, and it is highly recommended to regularly treat all porous or semi-porous surfaces where mould spores and water can congregate with Netbiokem DSAM, either by fogging or by spot treatment as appropriate.

Notice:

Hard surface disinfectant only. Use undiluted. Do not mix with detergents or other chemicals. Not to be used on the skin. Not to be used on medical devices or other therapeutic goods.

Proof of performance:

- Australian TGA Approved for COVID-19 claim (ARTG No. 336972)
- Conforms to Virucidal Effectiveness European Standard EN 14476
- AIRBUS CML-14-006C, CML 12-012A,
- AMS 1526, AMS 1452, AMS 1453, Boeing D6-7127M
- CFM 56 - CP2712
- NATO Stock No: 6840-14-5994327

Netbiokem DSAM

Callington Haven Pty Ltd

Chemwatch: 5377-95

Version No: 6.1.1.1

Safety Data Sheet according to WHS and ADG requirements

Chemwatch Hazard Alert Code: 1

Issue Date: 23/04/2020

Print Date: 23/04/2020

S.GHS.AUS.EN

SECTION 1 IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

Product Identifier

Product name	Netbiokem DSAM
Synonyms	Not Available
Other means of identification	Not Available

Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses	Use according to manufacturer's directions.
--------------------------	---

Details of the supplier of the safety data sheet

Registered company name	Callington Haven Pty Ltd
Address	30 South Street Rydalmere NSW 2116 Australia
Telephone	+61 2 9898 2700
Fax	+61 2 9475 0449
Website	www.callingtonhaven.com
Email	customerservice@callington.com

Emergency telephone number

Association / Organisation	Chemwatch	PRODUITS SANITAIRES AERONEFS	CHEMWATCH EMERGENCY RESPONSE
Emergency telephone numbers	+61 2 9186 1132	+33 (0)1 45 42 59 59	+61 1800 951 288
Other emergency telephone numbers	12345	Not Available	+61 2 9186 1132

Once connected and if the message is not in your preferred language then please dial 01

SECTION 2 HAZARDS IDENTIFICATION

Classification of the substance or mixture

Poisons Schedule	Not Applicable
Classification [1]	Not Applicable

Label elements

Hazard pictogram(s)	Not Applicable
SIGNAL WORD	NOT APPLICABLE

Hazard statement(s)

Not Applicable

Precautionary statement(s) Prevention

Not Applicable

Precautionary statement(s) Response

Not Applicable

Precautionary statement(s) Storage

Not Applicable

Precautionary statement(s) Disposal

Not Applicable

SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

Substances

See section below for composition of Mixtures

Mixtures

CAS No	%[weight]	Name
2372-82-9	0.95	<u>N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine</u>
9005-65-6	<0.5	<u>sorbitan monooleate, ethoxylated</u>
Not Available	balance	Ingredients determined not to be hazardous
Not Available		includes
7732-18-5	>90	<u>water</u>

SECTION 4 FIRST AID MEASURES

Description of first aid measures

Eye Contact	<p>If this product comes in contact with the eyes:</p> <ul style="list-style-type: none"> ▶ Wash out immediately with fresh running water. ▶ Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids. ▶ Seek medical attention without delay; if pain persists or recurs seek medical attention. ▶ Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.
Skin Contact	<p>If skin contact occurs:</p> <ul style="list-style-type: none"> ▶ Immediately remove all contaminated clothing, including footwear. ▶ Flush skin and hair with running water (and soap if available). ▶ Seek medical attention in event of irritation.
Inhalation	<ul style="list-style-type: none"> ▶ If fumes, aerosols or combustion products are inhaled remove from contaminated area. ▶ Other measures are usually unnecessary.
Ingestion	<ul style="list-style-type: none"> ▶ If swallowed do NOT induce vomiting. ▶ If vomiting occurs, lean patient forward or place on left side (head-down position, if possible) to maintain open airway and prevent aspiration. ▶ Observe the patient carefully. ▶ Never give liquid to a person showing signs of being sleepy or with reduced awareness; i.e. becoming unconscious. ▶ Give water to rinse out mouth, then provide liquid slowly and as much as casualty can comfortably drink. ▶ Seek medical advice.

Indication of any immediate medical attention and special treatment needed

Treat symptomatically.

SECTION 5 FIREFIGHTING MEASURES

Extinguishing media

The product contains a substantial proportion of water, therefore there are no restrictions on the type of extinguishing media which may be used. Choice of extinguishing media should take into account surrounding areas.

Though the material is non-combustible, evaporation of water from the mixture, caused by the heat of nearby fire, may produce floating layers of combustible substances.

In such an event consider:

- ▶ foam.
- ▶ dry chemical powder.
- ▶ carbon dioxide.

Special hazards arising from the substrate or mixture

Fire Incompatibility	None known.
-----------------------------	-------------

Advice for firefighters

Fire Fighting	<ul style="list-style-type: none"> ▶ Alert Fire Brigade and tell them location and nature of hazard. ▶ Wear breathing apparatus plus protective gloves in the event of a fire. ▶ Prevent, by any means available, spillage from entering drains or water courses. ▶ Use fire fighting procedures suitable for surrounding area. ▶ DO NOT approach containers suspected to be hot. ▶ Cool fire exposed containers with water spray from a protected location. ▶ If safe to do so, remove containers from path of fire. ▶ Equipment should be thoroughly decontaminated after use.
Fire/Explosion Hazard	<ul style="list-style-type: none"> ▶ The material is not readily combustible under normal conditions. ▶ However, it will break down under fire conditions and the organic component may burn. ▶ Not considered to be a significant fire risk. ▶ Heat may cause expansion or decomposition with violent rupture of containers. ▶ Decomposes on heating and may produce toxic fumes of carbon monoxide (CO). ▶ May emit acrid smoke. <p>Decomposes on heating and produces toxic fumes of: carbon dioxide (CO₂) nitrogen oxides (NO_x) other pyrolysis products typical of burning organic material. May emit poisonous fumes. May emit corrosive fumes.</p>
HAZCHEM	Not Applicable

SECTION 6 ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Continued...

See section 8

Environmental precautions

See section 12

Methods and material for containment and cleaning up

Minor Spills	<ul style="list-style-type: none"> ▪ Clean up all spills immediately. ▪ Avoid breathing vapours and contact with skin and eyes. ▪ Control personal contact with the substance, by using protective equipment. ▪ Contain and absorb spill with sand, earth, inert material or vermiculite. ▪ Wipe up. ▪ Place in a suitable, labelled container for waste disposal.
Major Spills	<p>Moderate hazard.</p> <ul style="list-style-type: none"> ▪ Clear area of personnel and move upwind. ▪ Alert Fire Brigade and tell them location and nature of hazard. ▪ Wear breathing apparatus plus protective gloves. ▪ Prevent, by any means available, spillage from entering drains or water course. ▪ Stop leak if safe to do so. ▪ Contain spill with sand, earth or vermiculite. ▪ Collect recoverable product into labelled containers for recycling. ▪ Neutralise/decontaminate residue (see Section 13 for specific agent). ▪ Collect solid residues and seal in labelled drums for disposal. ▪ Wash area and prevent runoff into drains. ▪ After clean up operations, decontaminate and launder all protective clothing and equipment before storing and re-using. ▪ If contamination of drains or waterways occurs, advise emergency services.

Personal Protective Equipment advice is contained in Section 8 of the SDS.

SECTION 7 HANDLING AND STORAGE

Precautions for safe handling

Safe handling	<ul style="list-style-type: none"> ▪ DO NOT allow clothing wet with material to stay in contact with skin ▪ Avoid all personal contact, including inhalation. ▪ Wear protective clothing when risk of exposure occurs. ▪ Use in a well-ventilated area. ▪ Prevent concentration in hollows and sumps. ▪ DO NOT enter confined spaces until atmosphere has been checked. ▪ DO NOT allow material to contact humans, exposed food or food utensils. ▪ Avoid contact with incompatible materials. ▪ When handling, DO NOT eat, drink or smoke. ▪ Keep containers securely sealed when not in use. ▪ Avoid physical damage to containers. ▪ Always wash hands with soap and water after handling. ▪ Work clothes should be laundered separately. Launder contaminated clothing before re-use. ▪ Use good occupational work practice. ▪ Observe manufacturer's storage and handling recommendations contained within this SDS. ▪ Atmosphere should be regularly checked against established exposure standards to ensure safe working conditions are maintained.
Other information	<ul style="list-style-type: none"> ▪ Store in original containers. ▪ Keep containers securely sealed. ▪ No smoking, naked lights or ignition sources. ▪ Store in a cool, dry, well-ventilated area. ▪ Store away from incompatible materials and foodstuff containers. ▪ Protect containers against physical damage and check regularly for leaks. ▪ Observe manufacturer's storage and handling recommendations contained within this SDS.

Conditions for safe storage, including any incompatibilities

Suitable container	<ul style="list-style-type: none"> ▪ Polyethylene or polypropylene container. ▪ Packing as recommended by manufacturer. ▪ Check all containers are clearly labelled and free from leaks.
Storage incompatibility	None known

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

Control parameters

OCCUPATIONAL EXPOSURE LIMITS (OEL)

INGREDIENT DATA

Not Available


EMERGENCY LIMITS

Ingredient	Material name	TEEL-1	TEEL-2	TEEL-3
Netbiokem DSAM	Not Available	Not Available	Not Available	Not Available
Ingredient	Original IDLH	Revised IDLH		
N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine	Not Available	Not Available		
sorbitan monooleate, ethoxylated	Not Available	Not Available		

Continued...

water	Not Available	Not Available
OCCUPATIONAL EXPOSURE BANDING		
Ingredient	Occupational Exposure Band Rating	Occupational Exposure Band Limit
N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine	E	≤ 0.1 ppm
sorbitan monooleate, ethoxylated	E	≤ 0.1 ppm
Notes:	Occupational exposure banding is a process of assigning chemicals into specific categories or bands based on a chemical's potency and the adverse health outcomes associated with exposure. The output of this process is an occupational exposure band (OEB), which corresponds to a range of exposure concentrations that are expected to protect worker health.	

Exposure controls

Appropriate engineering controls	<p>Engineering controls are used to remove a hazard or place a barrier between the worker and the hazard. Well-designed engineering controls can be highly effective in protecting workers and will typically be independent of worker interactions to provide this high level of protection. The basic types of engineering controls are:</p> <p>Process controls which involve changing the way a job activity or process is done to reduce the risk.</p> <p>Enclosure and/or isolation of emission source which keeps a selected hazard "physically" away from the worker and ventilation that strategically "adds" and "removes" air in the work environment. Ventilation can remove or dilute an air contaminant if designed properly. The design of a ventilation system must match the particular process and chemical or contaminant in use. Employers may need to use multiple types of controls to prevent employee overexposure.</p> <p>Local exhaust ventilation usually required. If risk of overexposure exists, wear approved respirator. Correct fit is essential to obtain adequate protection. Supplied-air type respirator may be required in special circumstances. Correct fit is essential to ensure adequate protection. An approved self contained breathing apparatus (SCBA) may be required in some situations. Provide adequate ventilation in warehouse or closed storage area. Air contaminants generated in the workplace possess varying "escape" velocities which, in turn, determine the "capture velocities" of fresh circulating air required to effectively remove the contaminant.</p> <table border="1"> <thead> <tr> <th>Type of Contaminant:</th> <th>Air Speed:</th> </tr> </thead> <tbody> <tr> <td>solvent, vapours, degreasing etc., evaporating from tank (in still air).</td> <td>0.25-0.5 m/s (50-100 f/min.)</td> </tr> <tr> <td>aerosols, fumes from pouring operations, intermittent container filling, low speed conveyer transfers, welding, spray drift, plating acid fumes, pickling (released at low velocity into zone of active generation)</td> <td>0.5-1 m/s (100-200 f/min.)</td> </tr> <tr> <td>direct spray, spray painting in shallow booths, drum filling, conveyer loading, crusher dusts, gas discharge (active generation into zone of rapid air motion)</td> <td>1-2.5 m/s (200-500 f/min.)</td> </tr> <tr> <td>grinding, abrasive blasting, tumbling, high speed wheel generated dusts (released at high initial velocity into zone of very high rapid air motion).</td> <td>2.5-10 m/s (500-2000 f/min.)</td> </tr> </tbody> </table> <p>Within each range the appropriate value depends on:</p> <table border="1"> <thead> <tr> <th>Lower end of the range</th> <th>Upper end of the range</th> </tr> </thead> <tbody> <tr> <td>1: Room air currents minimal or favourable to capture</td> <td>1: Disturbing room air currents</td> </tr> <tr> <td>2: Contaminants of low toxicity or of nuisance value only.</td> <td>2: Contaminants of high toxicity</td> </tr> <tr> <td>3: Intermittent, low production.</td> <td>3: High production, heavy use</td> </tr> <tr> <td>4: Large hood or large air mass in motion</td> <td>4: Small hood-local control only</td> </tr> </tbody> </table> <p>Simple theory shows that air velocity falls rapidly with distance away from the opening of a simple extraction pipe. Velocity generally decreases with the square of distance from the extraction point (in simple cases). Therefore the air speed at the extraction point should be adjusted, accordingly, after reference to distance from the contaminating source. The air velocity at the extraction fan, for example, should be a minimum of 1-2 m/s (200-400 f/min) for extraction of solvents generated in a tank 2 meters distant from the extraction point. Other mechanical considerations, producing performance deficits within the extraction apparatus, make it essential that theoretical air velocities are multiplied by factors of 10 or more when extraction systems are installed or used.</p>	Type of Contaminant:	Air Speed:	solvent, vapours, degreasing etc., evaporating from tank (in still air).	0.25-0.5 m/s (50-100 f/min.)	aerosols, fumes from pouring operations, intermittent container filling, low speed conveyer transfers, welding, spray drift, plating acid fumes, pickling (released at low velocity into zone of active generation)	0.5-1 m/s (100-200 f/min.)	direct spray, spray painting in shallow booths, drum filling, conveyer loading, crusher dusts, gas discharge (active generation into zone of rapid air motion)	1-2.5 m/s (200-500 f/min.)	grinding, abrasive blasting, tumbling, high speed wheel generated dusts (released at high initial velocity into zone of very high rapid air motion).	2.5-10 m/s (500-2000 f/min.)	Lower end of the range	Upper end of the range	1: Room air currents minimal or favourable to capture	1: Disturbing room air currents	2: Contaminants of low toxicity or of nuisance value only.	2: Contaminants of high toxicity	3: Intermittent, low production.	3: High production, heavy use	4: Large hood or large air mass in motion	4: Small hood-local control only
	Type of Contaminant:	Air Speed:																			
solvent, vapours, degreasing etc., evaporating from tank (in still air).	0.25-0.5 m/s (50-100 f/min.)																				
aerosols, fumes from pouring operations, intermittent container filling, low speed conveyer transfers, welding, spray drift, plating acid fumes, pickling (released at low velocity into zone of active generation)	0.5-1 m/s (100-200 f/min.)																				
direct spray, spray painting in shallow booths, drum filling, conveyer loading, crusher dusts, gas discharge (active generation into zone of rapid air motion)	1-2.5 m/s (200-500 f/min.)																				
grinding, abrasive blasting, tumbling, high speed wheel generated dusts (released at high initial velocity into zone of very high rapid air motion).	2.5-10 m/s (500-2000 f/min.)																				
Lower end of the range	Upper end of the range																				
1: Room air currents minimal or favourable to capture	1: Disturbing room air currents																				
2: Contaminants of low toxicity or of nuisance value only.	2: Contaminants of high toxicity																				
3: Intermittent, low production.	3: High production, heavy use																				
4: Large hood or large air mass in motion	4: Small hood-local control only																				
Personal protection																					
Eye and face protection	<ul style="list-style-type: none"> Wear safety glasses with side shields. Wear chemical goggles. Contact lenses may pose a special hazard; soft contact lenses may absorb and concentrate irritants. A written policy document, describing the wearing of lenses or restrictions on use, should be created for each workplace or task. This should include a review of lens absorption and adsorption for the class of chemicals in use and an account of injury experience. Medical and first-aid personnel should be trained in their removal and suitable equipment should be readily available. In the event of chemical exposure, begin eye irrigation immediately and remove contact lens as soon as practicable. Lens should be removed at the first signs of eye redness or irritation - lens should be removed in a clean environment only after workers have washed hands thoroughly. [CDC NIOSH Current Intelligence Bulletin 59], [AS/NZS 1336 or national equivalent] 																				
Skin protection	See Hand protection below																				
Hands/feet protection	<ul style="list-style-type: none"> Wear chemical protective gloves, e.g. PVC. Wear safety footwear or safety gumboots, e.g. Rubber <p>NOTE:</p> <ul style="list-style-type: none"> The material may produce skin sensitisation in predisposed individuals. Care must be taken, when removing gloves and other protective equipment, to avoid all possible skin contact. Contaminated leather items, such as shoes, belts and watch-bands should be removed and destroyed. <p>The selection of suitable gloves does not only depend on the material, but also on further marks of quality which vary from manufacturer to manufacturer. Where the chemical is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.</p> <p>The exact break through time for substances has to be obtained from the manufacturer of the protective gloves and has to be observed when making a final choice.</p> <p>Personal hygiene is a key element of effective hand care. Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturiser is recommended.</p> <p>Suitability and durability of glove type is dependent on usage. Important factors in the selection of gloves include:</p>																				

Netbiokem DSAM

	<ul style="list-style-type: none"> frequency and duration of contact, chemical resistance of glove material, glove thickness and dexterity <p>Select gloves tested to a relevant standard (e.g. Europe EN 374, US F739, AS/NZS 2161.1 or national equivalent).</p> <ul style="list-style-type: none"> When prolonged or frequently repeated contact may occur, a glove with a protection class of 5 or higher (breakthrough time greater than 240 minutes according to EN 374, AS/NZS 2161.10.1 or national equivalent) is recommended. When only brief contact is expected, a glove with a protection class of 3 or higher (breakthrough time greater than 60 minutes according to EN 374, AS/NZS 2161.10.1 or national equivalent) is recommended. Some glove polymer types are less affected by movement and this should be taken into account when considering gloves for long-term use. Contaminated gloves should be replaced. <p>As defined in ASTM F-739-96 in any application, gloves are rated as:</p> <ul style="list-style-type: none"> Excellent when breakthrough time > 480 min Good when breakthrough time > 20 min Fair when breakthrough time < 20 min Poor when glove material degrades <p>For general applications, gloves with a thickness typically greater than 0.35 mm, are recommended.</p> <p>It should be emphasised that glove thickness is not necessarily a good predictor of glove resistance to a specific chemical, as the permeation efficiency of the glove will be dependent on the exact composition of the glove material. Therefore, glove selection should also be based on consideration of the task requirements and knowledge of breakthrough times.</p> <p>Glove thickness may also vary depending on the glove manufacturer, the glove type and the glove model. Therefore, the manufacturers' technical data should always be taken into account to ensure selection of the most appropriate glove for the task.</p> <p>Note: Depending on the activity being conducted, gloves of varying thickness may be required for specific tasks. For example:</p> <ul style="list-style-type: none"> Thinner gloves (down to 0.1 mm or less) may be required where a high degree of manual dexterity is needed. However, these gloves are only likely to give short duration protection and would normally be just for single use applications, then disposed of. Thicker gloves (up to 3 mm or more) may be required where there is a mechanical (as well as a chemical) risk i.e. where there is abrasion or puncture potential <p>Gloves must only be worn on clean hands. After using gloves, hands should be washed and dried thoroughly. Application of a non-perfumed moisturiser is recommended.</p>
Body protection	See Other protection below
Other protection	<ul style="list-style-type: none"> Overalls. P.V.C. apron. Barrier cream. Skin cleansing cream. Eye wash unit.

Recommended material(s)

GLOVE SELECTION INDEX

Glove selection is based on a modified presentation of the: **"Forsberg Clothing Performance Index"**.
The effect(s) of the following substance(s) are taken into account in the **computer-generated** selection:
Netbiokem DSAM

Material	CPI
BUTYL	A
NEOPRENE	A
VITON	A
NATURAL RUBBER	C
PVA	C

* CPI - Chemwatch Performance Index

A: Best Selection

B: Satisfactory; may degrade after 4 hours continuous immersion

C: Poor to Dangerous Choice for other than short term immersion

NOTE: As a series of factors will influence the actual performance of the glove, a final selection must be based on detailed observation. -

* Where the glove is to be used on a short term, casual or infrequent basis, factors such as "feel" or convenience (e.g. disposability), may dictate a choice of gloves which might otherwise be unsuitable following long-term or frequent use. A qualified practitioner should be consulted.

Respiratory protection

Type AK-P Filter of sufficient capacity. (AS/NZS 1716 & 1715, EN 143:2000 & 149:2001, ANSI Z88 or national equivalent)

Selection of the Class and Type of respirator will depend upon the level of breathing zone contaminant and the chemical nature of the contaminant. Protection Factors (defined as the ratio of contaminant outside and inside the mask) may also be important.

Required minimum protection factor	Maximum gas/vapour concentration present in air p.p.m. (by volume)	Half-face Respirator	Full-Face Respirator
up to 10	1000	AK-AUS / Class1 P2	-
up to 50	1000	-	AK-AUS / Class 1 P2
up to 50	5000	Airline *	-
up to 100	5000	-	AK-2 P2
up to 100	10000	-	AK-3 P2
100+			Airline**

* - Continuous Flow ** - Continuous-flow or positive pressure demand

A(All classes) = Organic vapours, B AUS or B1 = Acid gasses, B2 = Acid gas or hydrogen cyanide(HCN), B3 = Acid gas or hydrogen cyanide(HCN), E = Sulfur dioxide(SO2), G = Agricultural chemicals, K = Ammonia(NH3), Hg = Mercury, NO = Oxides of nitrogen, MB = Methyl bromide, AX = Low boiling point organic compounds(below 65 degC)

- Cartridge respirators should never be used for emergency ingress or in areas of unknown vapour concentrations or oxygen content.
- The wearer must be warned to leave the contaminated area immediately on detecting any odours through the respirator. The odour may indicate that the mask is not functioning properly, that the vapour concentration is too high, or that the mask is not properly fitted. Because of these limitations, only restricted use of cartridge respirators is considered appropriate.
- Cartridge performance is affected by humidity. Cartridges should be changed after 2 hr of continuous use unless it is determined that the humidity is less than 75%, in which case, cartridges can be used for 4 hr. Used cartridges should be discarded daily, regardless of the length of time used

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

Appearance	Clear liquid; mixes in water.
-------------------	-------------------------------

Continued...

Physical state	Liquid	Relative density (Water = 1)	0.98-1.02
Odour	Not Available	Partition coefficient n-octanol / water	Not Available
Odour threshold	Not Available	Auto-ignition temperature (°C)	Not Available
pH (as supplied)	10-11	Decomposition temperature	Not Available
Melting point / freezing point (°C)	Not Available	Viscosity (cSt)	Not Available
Initial boiling point and boiling range (°C)	Not Available	Molecular weight (g/mol)	Not Applicable
Flash point (°C)	Not Available	Taste	Not Available
Evaporation rate	Not Available	Explosive properties	Not Available
Flammability	Not Available	Oxidising properties	Not Available
Upper Explosive Limit (%)	Not Applicable	Surface Tension (dyn/cm or mN/m)	Not Available
Lower Explosive Limit (%)	Not Applicable	Volatile Component (%vol)	Not Applicable
Vapour pressure (kPa)	Not Available	Gas group	Not Available
Solubility in water	Miscible	pH as a solution (1%)	Not Available
Vapour density (Air = 1)	Not Available	VOC g/L	Not Applicable

SECTION 10 STABILITY AND REACTIVITY

Reactivity	See section 7
Chemical stability	<ul style="list-style-type: none"> ■ Unstable in the presence of incompatible materials. ■ Product is considered stable. ■ Hazardous polymerisation will not occur.
Possibility of hazardous reactions	See section 7
Conditions to avoid	See section 7
Incompatible materials	See section 7
Hazardous decomposition products	See section 5

SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Inhaled	Not normally a hazard due to non-volatile nature of product
Ingestion	Accidental ingestion of the material may be damaging to the health of the individual.
Skin Contact	This material can cause inflammation of the skin on contact in some persons. Open cuts, abraded or irritated skin should not be exposed to this material. Entry into the blood-stream, through, for example, cuts, abrasions or lesions, may produce systemic injury with harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.
Eye	This material can cause eye irritation and damage in some persons.
Chronic	Skin contact with the material is more likely to cause a sensitisation reaction in some persons compared to the general population. Substance accumulation, in the human body, may occur and may cause some concern following repeated or long-term occupational exposure.

Netbiokem DSAM	TOXICITY	IRRITATION
	Not Available	Not Available
N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine	TOXICITY	IRRITATION
	dermal (rat) LD50: >600 mg/kg ^[2] Oral (rat) LD50: >25-200 mg/kg ^[1]	Skin (rabbit): Corrosive * Skin: adverse effect observed (corrosive) ^[1]
sorbitan monooleate, ethoxylated	TOXICITY	IRRITATION
	Oral (rat) LD50: 37260 mg/kg ^[2]	Eye (rabbit): 150 mg - mild Skin (rabbit): - slight
water	TOXICITY	IRRITATION
	Oral (rat) LD50: >90000 mg/kg ^[2]	Not Available

Legend: 1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2.* Value obtained from manufacturer's SDS. Unless otherwise specified data extracted from RTECS - Register of Toxic Effect of chemical Substances

N-(3-AMINOPROPYL)-N-DODECYL-1,3-PROPANEDIAMINE	The following information refers to contact allergens as a group and may not be specific to this product. Contact allergies quickly manifest themselves as contact eczema, more rarely as urticaria or Quincke's oedema. The pathogenesis of contact eczema involves a cell-mediated (T lymphocytes) immune reaction of the delayed type. Other allergic skin reactions, e.g. contact urticaria, involve antibody-mediated immune reactions. The significance of the contact allergen is not simply determined by its sensitisation potential: the distribution of the substance and the opportunities for contact with it are equally important. A weakly sensitising substance which is widely
--	--

Continued...

	<p>distributed can be a more important allergen than one with stronger sensitising potential with which few individuals come into contact. From a clinical point of view, substances are noteworthy if they produce an allergic test reaction in more than 1% of the persons tested.</p> <p>FND ether amines and FND amines are very similar in structure (length of chain or degree of saturation), function and toxicity. Acute exposure to FND ether amines by oral, dermal and inhalation may produce moderate to slight toxicity but repeated skin contact can be highly irritating. However, exposure did not produce any organ-specific toxicity, genetic, reproductive or developmental defect same as in FND amines.</p> <p>The material may produce respiratory tract irritation, and result in damage to the lung including reduced lung function.</p> <p>For alkyl polyamines:</p> <p>The alkyl polyamines cluster consists of two terminal primary and at least one secondary amine groups and are derivatives of low molecular weight ethylenediamine, propylenediamine or hexanediamine. Toxicity depends on route of exposure. Cluster members have been shown to cause skin irritation or sensitisation, eye irritation and genetic defects, but have not been shown to cause cancer.</p> <p>Overexposure to most of these materials may cause adverse health effects.</p> <p>Many amine-based compounds can cause release of histamines, which, in turn, can trigger allergic and other physiological effects, including constriction of the bronchi or asthma and inflammation of the cavity of the nose. Whole-body symptoms include headache, nausea, faintness, anxiety, a decrease in blood pressure, rapid heartbeat, itching, reddening of the skin, urticaria (hives) and swelling of the face, which are usually transient.</p> <p>There are generally four routes of possible or potential exposure: inhalation, skin contact, eye contact, and swallowing.</p> <p>Inhalation: Inhaling vapours may result in moderate to severe irritation of the tissues of the nose and throat and can irritate the lungs. Higher concentrations of certain amines can produce severe respiratory irritation, characterized by discharge from the nose, coughing, difficulty in breathing and chest pain. Chronic exposure via inhalation may cause headache, nausea, vomiting, drowsiness, sore throat, inflammation of the bronchi and lungs, and possible lung damage. Repeated and/or prolonged exposure to some amines may result in liver disorders, jaundice and liver enlargement. Some amines have been shown to cause kidney, blood and central nervous system disorders in animal studies.</p> <p>While most polyurethane amine catalysts are not sensitizers, some certain individuals may also become sensitized to amines and my experience distress while breathing, including asthma-like attacks, whenever they are subsequently exposed to even very small amounts of vapours. Once sensitized, these individuals must avoid any further exposure to amines. Chronic overexposure may lead to permanent lung injury, including reduction in lung function, breathlessness, chronic inflammation of the bronchi, and immunologic lung disease.</p> <p>Products with higher vapour pressures may reach higher concentrations in the air, and this increases the likelihood of worker exposure.</p> <p>Inhalation hazards are increased when exposure to amine catalysts occurs in situations that produce aerosols, mists or heated vapours. Such situations include leaks in fitting or transfer lines. Medical conditions generally aggravated by inhalation exposure include asthma, bronchitis and emphysema.</p> <p>Skin contact: Skin contact with amine catalysts poses a number of concerns. Direct skin contact can cause moderate to severe irritation and injury, from simple redness and swelling to painful blistering, ulceration, and chemical burns. Repeated or prolonged exposure may also result in severe cumulative skin inflammation. Skin contact with some amines may result in allergic sensitization. Sensitized persons should avoid all contact with amine catalysts. Whole-body effects resulting from the absorption of the amines though skin exposure may include headaches, nausea, faintness, anxiety, decrease in blood pressure, reddening of the skin, hives, and facial swelling. These symptoms may be related to the pharmacological action of the amines, and they are usually temporary.</p> <p>Eye contact: Amine catalysts are alkaline and their vapours are irritating to the eyes, even at low concentrations. Direct contact with liquid amine may cause severe irritation and tissue injury, and the "burning" may lead to blindness. Contact with solid products may result in mechanical irritation, pain and corneal injury.</p> <p>Exposed persons may experience excessive tearing, burning, inflammation of the conjunctiva, and swelling of the cornea, which manifests as a blurred or foggy vision with a blue tint, and sometimes a halo phenomenon around lights. These symptoms are temporary and usually disappear when exposure ends. Some people may experience this effect even when exposed to concentrations that do not cause respiratory irritation.</p> <p>Ingestion: Amine catalysts have moderate to severe toxicity if swallowed. Some amines can cause severe irritation, ulcers and burns of the mouth, throat, gullet and gastrointestinal tract. Material aspirated due to vomiting can damage the bronchial tubes and the lungs. Affected people may also experience pain in the chest or abdomen, nausea, bleeding of the throat and gastrointestinal tract, diarrhea, dizziness, drowsiness, thirst, collapse of circulation, coma and even death.</p> <p>The acute oral LD50 in the rat was estimated to be ~ 260 mg/kg. Dermal LD50 was determined to be greater than 600 mg/kg pure substance.</p> <p>The substance (in 30% concentration) is severely irritating/ corrosive to the skin but was not a sensitizer when tested in low concentrations. A 90-day oral toxicity study showed at higher doses (30 and 90 mg/kg/day), a dose related increase in some liver enzymes but, no treatment related effects at doses of 5 or 10 mg/kg/day. It was not found to produce mutations in <i>S. typhimurium</i>, or the Chinese hamster V-79 cell line and there were no clastogenic effects in the Chinese hamster V-79 cell line. NICNAS Public Report 1995</p>
<p>SORBITAN MONOOLEATE, ETHOXYLATED</p>	<p>Polyoxyethylene sorbitan monooleate (TW80) is widely used as an emulsifier or solubilizer in a variety of foods, cosmetics and other commercial Products. In addition, TW80 in water has been used as a vehicle for the delivery of other chemical agents to pregnant laboratory animals by the oral route of administration (eg. by gavage or in the drinking water). Based upon the large population of pregnant women potentially exposed to TW80, and because of its use as a vehicle in laboratory animal studies, TW80 was evaluated for potential developmental toxicity. Timed-mated Sprague-Dawley-derived (CD®) rats (25 per group) were exposed to 0, 500 or 5000 mg/kg/day of TW80. Aqueous solutions were delivered by gavage in a volume of 5 ml/kg of body weight on gestational days (gd) 6 through 15. At termination (gd 20), the uterus was removed and examined to determine pregnancy status, and to evaluate the number of resorptions, and dead or live fetuses. Dead or live fetuses were weighed, and live fetuses were examined for external, visceral and skeletal defects. All treated females survived to scheduled necropsy and 19-23 pregnancies per group were confirmed. No dose-related signs of toxicity were observed for individual animals during the in-life phase of the study or at scheduled necropsy. Average maternal body weight (gd 0, 3, 6, 9, 12, 15, 18, or 20) did not differ among treatment groups, nor was there a treatment related change in maternal weight gain during treatment or gestation (absolute or corrected). There were no treatment-related effects upon the following maternal organ weights: gravid weight (absolute), kidney weight (absolute or relative), and heart weight (absolute or relative). Relative maternal liver weight (% body weight on gd 20 or % corrected body weight) was elevated in both TW80 groups and absolute liver weight was elevated at 500 mg/kg/day. Maternal food intake was comparable across groups during the pre- and post-treatment periods, but was decreased by 14% during the first 3 days of treatment at 5000 mg/kg/day relative to the vehicle control group. Maternal relative water intake was comparable among treatment groups throughout gestation. No differences among groups were noted for the number of corpora lutea per dam, the number of implantation sites per dam or the percent preimplantation loss per litter. No adverse effects were noted on the growth, viability or morphological development of the conceptuses. In conclusion, the maternal LOAEL was 500 mg/kg/day (based upon an increase in maternal relative liver weight). No definitive adverse effects of TW80 upon prenatal development were noted in this study. Thus, the developmental NOAEL was greater than 5000 mg/kg/day.</p> <p>Laboratory (in vitro) and animal studies show, exposure to the material may result in a possible risk of irreversible effects, with the possibility of producing mutation.</p> <p>For sorbitan esters, ethoxylated (syn: polyoxyethylene sorbitan esters):</p> <p>Some of the early short-term studies with these polyoxyethylene sorbitan esters in rats and hamsters showed deleterious effects. Subsequent work suggests that these were largely due to diarrhoea resulting from a large amount of unabsorbed polyglycol, possibly aggravated in some experiments by the use of an unsuitable basal diet. Since that time there has been considerable improvement in testing procedures, and more extensive long-term studies have been carried out. It seems reasonable therefore to base the evaluation of these substances on the levels causing no adverse effects indicated by the results of the more recent investigations.</p> <p>The significance of the local tumours which were produced by injection has been discussed at the meeting of the Scientific Group (1966). No increase in tumour incidence has followed the oral intake of polyoxyethylene sorbitan esters. Furthermore, large doses of the oleate and stearate have been well tolerated by human subjects.</p> <p>Polyoxyethylene (20) sorbitan monoester of lauric, oleic, palmitic and stearic acid and triester of stearic acid</p> <p>Seventeenth Report of the Joint FAO/WHO Expert Committee on Food Additives, Wld Hlth Org. Techn. Rep. Ser., 1974, No. 539; FAO Nutrition Meetings Report Series, 1974, No. 53.</p> <p>Polyethers (such as ethoxylated surfactants and polyethylene glycols) are highly susceptible to being oxidized in the air. They then form complex mixtures of oxidation products.</p> <p>Animal testing reveals that whole the pure, non-oxidised surfactant is non-sensitizing, many of the oxidation products are sensitizers. The oxidation products also cause irritation.</p>

Netbiokem DSAM

	The sorbitan esters are agents that typically find use as emulsifiers, stabilizers, and thickeners in foods, cosmetics and medical products. They do not represent a toxicological concern since they are derived from naturally occurring materials and are ultimately metabolised back to these same natural constituents.		
N-(3-AMINOPROPYL)-N-DODECYL-1,3-PROPANEDIAMINE & SORBITAN MONOOLEATE, ETHOXYLATED	Asthma-like symptoms may continue for months or even years after exposure to the material ends. This may be due to a non-allergic condition known as reactive airways dysfunction syndrome (RADS) which can occur after exposure to high levels of highly irritating compound. Main criteria for diagnosing RADS include the absence of previous airways disease in a non-atopic individual, with sudden onset of persistent asthma-like symptoms within minutes to hours of a documented exposure to the irritant. Other criteria for diagnosis of RADS include a reversible airflow pattern on lung function tests, moderate to severe bronchial hyperreactivity on methacholine challenge testing, and the lack of minimal lymphocytic inflammation, without eosinophilia. RADS (or asthma) following an irritating inhalation is an infrequent disorder with rates related to the concentration of and duration of exposure to the irritating substance. On the other hand, industrial bronchitis is a disorder that occurs as a result of exposure due to high concentrations of irritating substance (often particles) and is completely reversible after exposure ceases. The disorder is characterized by difficulty breathing, cough and mucus production. The material may be irritating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis. The material may cause skin irritation after prolonged or repeated exposure and may produce on contact skin redness, swelling, the production of vesicles, scaling and thickening of the skin.		
N-(3-AMINOPROPYL)-N-DODECYL-1,3-PROPANEDIAMINE & SORBITAN MONOOLEATE, ETHOXYLATED & WATER	No significant acute toxicological data identified in literature search.		
Acute Toxicity	×	Carcinogenicity	×
Skin Irritation/Corrosion	×	Reproductivity	×
Serious Eye Damage/Irritation	×	STOT - Single Exposure	×
Respiratory or Skin sensitisation	×	STOT - Repeated Exposure	×
Mutagenicity	×	Aspiration Hazard	×

Legend: **×** – Data either not available or does not fill the criteria for classification
✓ – Data available to make classification

SECTION 12 ECOLOGICAL INFORMATION

Toxicity

	ENDPOINT	TEST DURATION (HR)	SPECIES	VALUE	SOURCE
Netbiokem DSAM	Not Available	Not Available	Not Available	Not Available	Not Available
N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine	LC50	96	Fish	0.431mg/L	2
	EC50	48	Crustacea	0.073mg/L	2
	EC50	96	Algae or other aquatic plants	0.054mg/L	2
	NOEC	72	Algae or other aquatic plants	0.007mg/L	2
sorbitan monooleate, ethoxylated	Not Available	Not Available	Not Available	Not Available	Not Available
water	LC50	96	Fish	897.520mg/L	3
	EC50	96	Algae or other aquatic plants	8768.874mg/L	3
Legend:	Extracted from 1. IUCLID Toxicity Data 2. Europe ECHA Registered Substances - Ecotoxicological Information - Aquatic Toxicity 3. EPIWIN Suite V3.12 (QSAR) - Aquatic Toxicity Data (Estimated) 4. US EPA, Ecotox database - Aquatic Toxicity Data 5. ECETOC Aquatic Hazard Assessment Data 6. NITE (Japan) - Bioconcentration Data 7. METI (Japan) - Bioconcentration Data 8. Vendor Data				

Harmful to aquatic organisms.
DO NOT discharge into sewer or waterways.

Persistence and degradability

Ingredient	Persistence: Water/Soil	Persistence: Air
water	LOW	LOW

Bioaccumulative potential

Ingredient	Bioaccumulation
water	LOW (LogKOW = -1.38)

Mobility in soil

Ingredient	Mobility
water	LOW (KOC = 14.3)

Continued...

SECTION 13 DISPOSAL CONSIDERATIONS

Waste treatment methods

Product / Packaging disposal	<p>Legislation addressing waste disposal requirements may differ by country, state and/ or territory. Each user must refer to laws operating in their area. In some areas, certain wastes must be tracked.</p> <p>A Hierarchy of Controls seems to be common - the user should investigate:</p> <ul style="list-style-type: none"> ▶ Reduction ▶ Reuse ▶ Recycling ▶ Disposal (if all else fails) <p>This material may be recycled if unused, or if it has not been contaminated so as to make it unsuitable for its intended use. If it has been contaminated, it may be possible to reclaim the product by filtration, distillation or some other means. Shelf life considerations should also be applied in making decisions of this type. Note that properties of a material may change in use, and recycling or reuse may not always be appropriate.</p> <ul style="list-style-type: none"> ■ DO NOT allow wash water from cleaning or process equipment to enter drains. ■ It may be necessary to collect all wash water for treatment before disposal. ■ In all cases disposal to sewer may be subject to local laws and regulations and these should be considered first. ■ Where in doubt contact the responsible authority. ■ Recycle wherever possible. ■ Consult manufacturer for recycling options or consult local or regional waste management authority for disposal if no suitable treatment or disposal facility can be identified. ■ Dispose of by: burial in a land-fill specifically licensed to accept chemical and / or pharmaceutical wastes or incineration in a licensed apparatus (after admixture with suitable combustible material). ■ Decontaminate empty containers. Observe all label safeguards until containers are cleaned and destroyed.
-------------------------------------	--

SECTION 14 TRANSPORT INFORMATION

Labels Required

Marine Pollutant	NO
HAZCHEM	Not Applicable

Land transport (ADG): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS

Air transport (ICAO-IATA / DGR): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS

Sea transport (IMDG-Code / GGVSee): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS

Transport in bulk according to Annex II of MARPOL and the IBC code

Not Applicable

SECTION 15 REGULATORY INFORMATION

Safety, health and environmental regulations / legislation specific for the substance or mixture

N-(3-AMINOPROPYL)-N-DODECYL-1,3-PROPANEDIAMINE IS FOUND ON THE FOLLOWING REGULATORY LISTS

Australia Inventory of Chemical Substances (AICS)

SORBITAN MONOOLEATE, ETHOXYLATED IS FOUND ON THE FOLLOWING REGULATORY LISTS

Australia Inventory of Chemical Substances (AICS)

WATER IS FOUND ON THE FOLLOWING REGULATORY LISTS

Australia Inventory of Chemical Substances (AICS)

ECHA SUMMARY

Ingredient	CAS number	Index No	ECHA Dossier
N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine	2372-82-9	Not Available	01-2119980592-29-XXXX

Harmonisation (C&L Inventory)	Hazard Class and Category Code(s)	Pictograms Signal Word Code(s)	Hazard Statement Code(s)
1	Acute Tox. 3; Skin Corr. 1C; Eye Dam. 1; STOT RE 2; Aquatic Acute 1; Aquatic Chronic 1	GHS09; GHS08; GHS05; GHS06; Dgr	H301; H314; H318; H373; H400; H410

Harmonisation Code 1 = The most prevalent classification. Harmonisation Code 2 = The most severe classification.

Ingredient	CAS number	Index No	ECHA Dossier
sorbitan monooleate, ethoxylated	9005-65-6	Not Available	01-2120057650-60-XXXX

Harmonisation (C&L Inventory)	Hazard Class and Category Code(s)	Pictograms Signal Word Code(s)	Hazard Statement Code(s)
1	Not Classified	Not Available	Not Available

Harmonisation Code 1 = The most prevalent classification. Harmonisation Code 2 = The most severe classification.

Ingredient	CAS number	Index No	ECHA Dossier
------------	------------	----------	--------------

Continued...

water	7732-18-5	Not Available	Not Available
Harmonisation (C&L Inventory)	Hazard Class and Category Code(s)	Pictograms Signal Word Code(s)	Hazard Statement Code(s)
1	Not Classified	Not Available	Not Available

Harmonisation Code 1 = The most prevalent classification. Harmonisation Code 2 = The most severe classification.

National Inventory Status

National Inventory	Status
Australia - AICS	Yes
Canada - DSL	Yes
Canada - NDSL	No (N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine; sorbitan monooleate, ethoxylated; water)
China - IECSC	Yes
Europe - EINEC / ELINCS / NLP	Yes
Japan - ENCS	Yes
Korea - KECI	No (N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine)
New Zealand - NZIoC	Yes
Philippines - PICCS	Yes
USA - TSCA	Yes
Taiwan - TCSI	Yes
Mexico - INSQ	No (N-(3-aminopropyl)-N-dodecyl-1,3-propanediamine)
Vietnam - NCI	Yes
Russia - ARIPS	Yes

Legend:
Yes = All CAS declared ingredients are on the inventory
No = One or more of the CAS listed ingredients are not on the inventory and are not exempt from listing (see specific ingredients in brackets)

SECTION 16 OTHER INFORMATION

Revision Date	23/04/2020
Initial Date	28/01/2020

SDS Version Summary

Version	Issue Date	Sections Updated
5.1.1.1	25/03/2020	Ingredients
6.1.1.1	23/04/2020	Classification, Ingredients

Other information

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references.

The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings. Risks may be determined by reference to Exposures Scenarios. Scale of use, frequency of use and current or available engineering controls must be considered.

Definitions and abbreviations

PC— TWA: Permissible Concentration-Time Weighted Average
 PC-STEL: Permissible Concentration-Short Term Exposure Limit
 IARC: International Agency for Research on Cancer
 ACGIH: American Conference of Governmental Industrial Hygienists
 STEL: Short Term Exposure Limit
 TEEL: Temporary Emergency Exposure Limit
 IDLH: Immediately Dangerous to Life or Health Concentrations
 OSF: Odour Safety Factor
 NOAEL :No Observed Adverse Effect Level
 LOAEL: Lowest Observed Adverse Effect Level
 TLV: Threshold Limit Value
 LOD: Limit Of Detection
 OTV: Odour Threshold Value
 BCF: BioConcentration Factors
 BEI: Biological Exposure Index

This document is copyright.

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH.

TEL (+61 3) 9572 4700.